

OPTICAL BONDING vs NO BONDING

CUSTOM OPTICAL BONDING SERIES · IP65

43" IP65 Optical Bonding Embedded Monitor

Optical bonding · IP65 sealed · stainless steel housing

MODEL
STD-OB43TM-02

Panel 32" TFT LCD
1920×1080 · 16:9 · 350 cd/m²

43"	1920×1080	350 nits	10-point	−10~60 ℃	IP65
SCREEN SIZE	RESOLUTION	BRIGHTNESS	PCAP TOUCH	OPERATING	IP RATING


Anti-Magnetic Interference

Resistant to High & Low Temperature

FIG. 1 PRODUCT VIEWS



FRONT



REAR · VESA 200×200

· IP65 sealed · aluminium profile housing

01 DISPLAY

Panel	TFT LCD, Anti-glare
Resolution	1920 × 1080 (16:9)
Brightness	350 cd/m²
Contrast	1200 : 1
View angle	89 / 89 / 89 / 89
Colour	16.7 M
Response	8 ms

02 COVER GLASS

Glass	3 mm tempered, 6H
Touch	10-point PCAP
Bonding	Optical bonding
Seal	IP65 full unit

03 INTERFACE

Signal	VGA ×1 / HDMI ×1
Power	AC 100–240V / 60W

04 OPTICAL BONDING

Process	Optical bonding
Benefit	No fogging, higher contrast
Sunlight	Readable in direct sunlight
Option	AR / AF / AG coating

05 MECHANICAL

Outline	998 × 588 × 58.6 mm
Housing	metal front bezel, IP65
VESA	200 × 200 mm
Net weight	Estimated 29 kg
Gross weight	Estimated 38 kg
Carton	Estimated 110 × 58 × 8.5 cm

06 RELIABILITY

Operating	−10 ~ 60 ℃
Storage	−20 ~ 60 ℃
Humidity	10% to 80%
Seal	IP65 front & rear

NOTES

1. Dimensions in mm, tolerance ±1 mm.
2. Optical bonding is standard; AR / AF coating optional.
3. Shell structure can be customised per project.

Shenzhen Superstark Technology Co., Ltd.
Web: www.starktouchdevice.com Email: edison.cheng@starktouchdevice.com
WhatsApp: +86 134 8064 6839

Dimensions & Installation


Overall W×H×D, active area and VESA pitch follow the certified drawing. Unit: mm.



OPTICAL BONDING vs NO BONDING

FIG. 2 OUTLINE DIMENSIONS

NTS · UNIT: mm · ±1

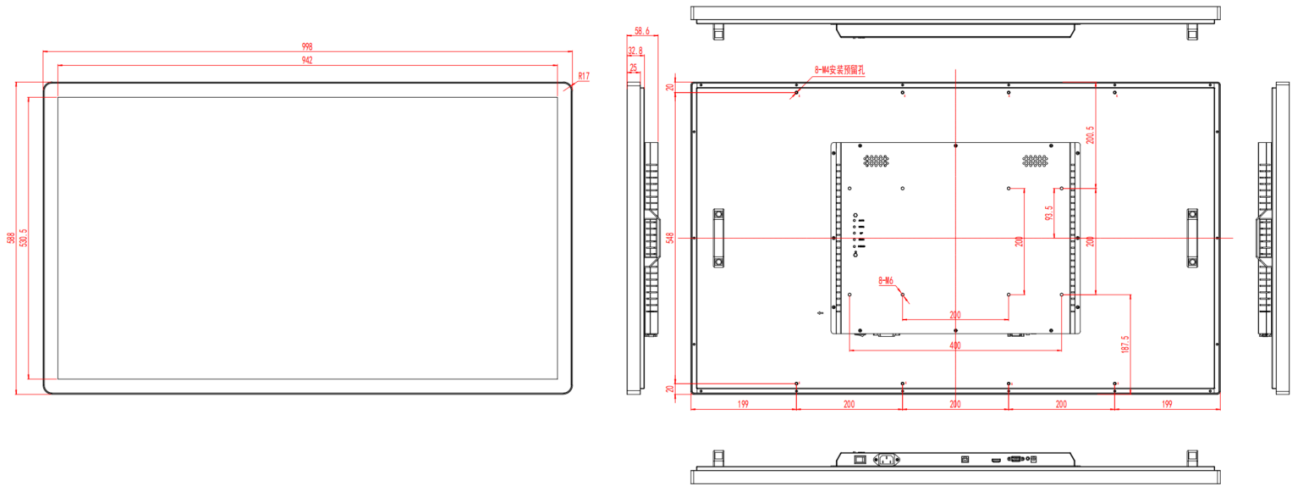

DIMENSION TABLE

Ref.	ITEM	VALUE	NOTE
W	Overall width	998 mm	±1
H	Overall height	588 mm	±1
D	Depth	58.6 mm	incl. rear VESA boss
VA	Active area	940.896 × 529.254 mm	16:9
VESA	VESA pitch	200 × 200 mm	4 × M6

FIG. 4 MOUNTING

VESA 300 × 200 wall mount	standard
Desktop stand	optional
Ceiling / hanging bracket	optional
Flush recess (custom frame)	on request

IP65 sealed enclosure; cable glands on rear bottom; VESA pattern fits standard brackets.

FIG. 3 INTERFACE LAYOUT



DC 24 V	Round 3-pin	Power input (adapter + cord)
HDMI	Waterproof port	Signal input, with cable
HDMI-type	Waterproof port	Second port, option / on request

Waterproof connectors configured per project; VGA / Audio via adapter cable.

STARK TOUCH DEVICE

PROJECT
Custom Optical Bonding Series

DWG NO.
STD-DS-OB43TM02

REV.
A

MODEL
STD-OB43TM-02

SCALE
NTS

DATE
2026.11

SHEET
2/3

Shenzhen Superstark Technology Co., Ltd.
Web: www.starktouchdevice.com Email: edison.cheng@starktouchdevice.com
WhatsApp: +86 134 8064 6839


OPTICAL BONDING vs NO BONDING

SELECTION & PACKAGING

Model naming, box contents, certification and series overview.

01 MODEL NAMING

STD	OB	43TM	02
STARK	Optical Bonding	43 inch	Version

· TM = touch monitor · PC = panel PC (X86 / A) · AIO = all-in-one display · EM = embedded monitor

· PC models add a trailing -X (Intel) or -A (Android) to indicate the platform.

· Example: STD-OB32CTM-IP65 = STARK optical bonding, 32 inch capacitive touch monitor, IP65.

02 BOX CONTENTS

- **Monitor ×1**
  with optical bonding and IP65 seal
- **HDMI cable ×1**
  length 1.5 m
- **Waterproof connector caps**
  pre-installed
- **Power adapter + cord ×1**
  DC 24 V for TM models
- **USB touch cable ×1**
  touch models only
- **Quick start guide ×1**
  EN / CN

03 CERTIFICATION

Certification **CE / FCC**

The product complies with CE and FCC requirements. Certificates are issued per model and available on request.

04 SERIES OVERVIEW

Model	Size	Resolution	Brightness	Form
STD-OB156IP65-02	15.6"	1920×1080	450 nits	Panel PC X86
STD-OB156EBPC	15.6"	1920×1080	800 nits	Panel PC Android
STD-OB215IP65-02	21.5"	1920×1080	300 nits	Panel PC X86
STD-OB215EBPC	21.5"	1920×1080	250 nits	Panel PC Android
STD-OB32CTM-IP65	32"	1920×1080	1000 nits	Touch monitor
STD-OB55IP65TM	55"	1920×1080	1500 nits	Touch monitor
STD-OB32IP65TM	32"	1920×1080	1000 nits	All-in-one display
STD-OB43IP65TM	43"	1920×1080	1000 nits	All-in-one display
STD-OB32TM-02	32"	1920×1080	300 nits	Embedded monitor
STD-OB43TM-02	43"	1920×1080	350 nits	Embedded monitor

CUSTOMISATION Size, brightness, interface and housing can be tailored to your project.

05 REVISION HISTORY

Rev	Date	Description
Rev A	2026.11	Initial release

Shenzhen Superstark Technology Co., Ltd.
Web: www.starktouchdevice.com Email: edison.cheng@starktouchdevice.com
WhatsApp: +86 134 8064 6839